


MELAWOOD
SUPAGLOSS

It's the MelaWood® SupaGloss™ Guide.

Design, manufacture, craft and care



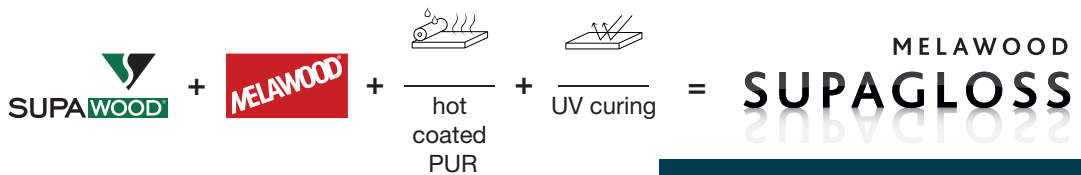



**D.I.Y.
 SUPERSTORE**

**MelaWood®
 SupaGloss™**

DIN EN 13722
 Gloss level > 101 GE (20°)

Applications



Hot coated polyurethane (PUR) gloss and ultraviolet (UV) light cured

Making use of state-of-the-art, patented technologies, MelaWood® SupaGloss™ gives you a high-end, desirable and hard-wearing gloss decorative finish.


Hot coated polyurethane (PUR) is applied to MelaWood® with a SupaWood® core and then cured using ultraviolet (UV) light, producing a durable, high gloss surface with good wear and scratch resistance.

This technology also gives MelaWood® SupaGloss™ its consistent stability and visual depth. You can work in confidence knowing your finished product will look superb.

Locally manufactured by PG Bison, to international standards, MelaWood® SupaGloss™ gives you

the assurance of a dependable, readily available product, consistent in colour and surface finish. You never have to worry about one batch of board not matching the next or the possibility of discolouration.

With matching décor in a PEEN finish on the reverse side, MelaWood® SupaGloss™ is supplied with a protective film to shield the gloss face during handling and processing, so your finished product can arrive on site looking as good as you intended.

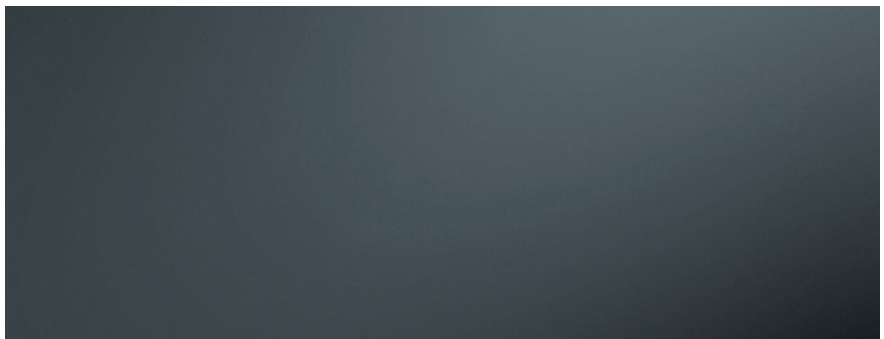



Gloss level
**> 101
GE (20°)**



**Locally
produced**

**Cost
effective
and
value for
money**

Advantages of MelaWood® SupaGloss™

- > Gloss level > 101 GE (20°)
- > Durable, UV hardened gloss surface
- > Superior machinability over conventional UV coatings
- > Made locally to international standards
- > Contemporary and stylish range
- > Consistency in quality and colour
- > Trusted MelaWood® décor on quality SupaWood® core
- > Available in 2750mm x 1830mm for better yield and less waste
- > Protective film shields gloss surface during handling and processing
- > Cost effective and value for money
- > Matched edging available locally

To ensure a clean, problem free removal, MelaWood® SupaGloss™'s protective film should be removed as soon as possible after processing and installation and 5 months, at the latest, after delivery.

MelaWood® SupaGloss™

MelaWood® SupaGloss™ sold in pack sizes only

Thickness	Pack size	Sheet sizes and tonnage
16mm	5	0.33 tons
16mm	20	1.31 tons

Range Samples

MELAWOOD
SUPAGLOSS

EASTERN
D.I.Y.
SUPERSTORE

