



WATERPROOFING OF IBR AND CORRUGATED METAL ROOFS




Check and secure all roof bolts and replace if and when necessary

Wire brush all rust and any flaking paint

High pressure wash removing all sand, dust and debris insuring a clean surface

Drill and secure side laps with heavy duty rivets where loose

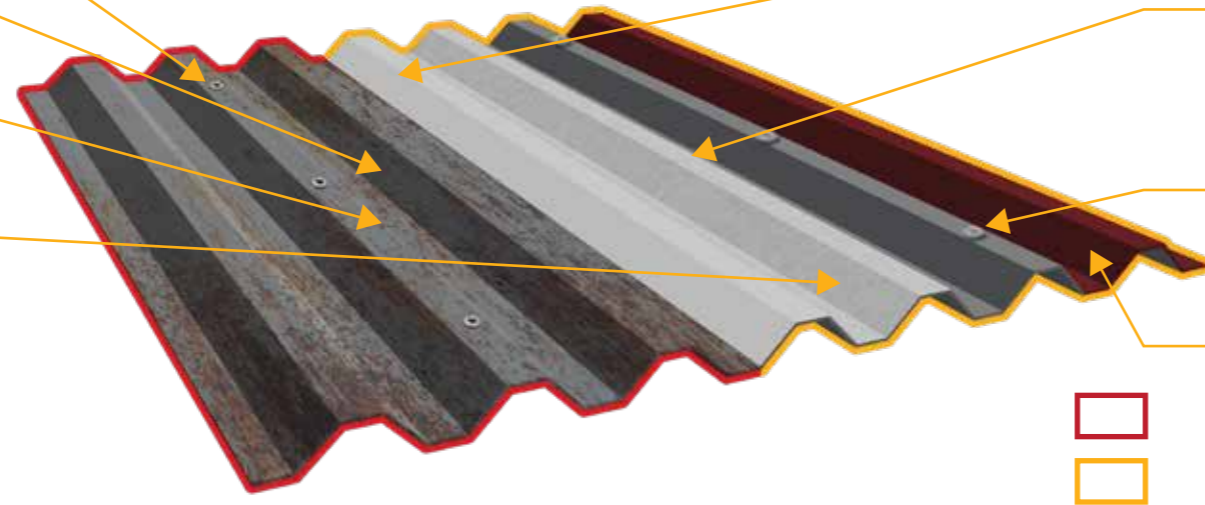

Apply one coat of FLASH HARRY RUST STOP over all rusted areas

Apply 3 coats FLASH HARRY LIQUID PLASTIC reinforced with 100mm S.B.P. membrane to all side and end laps at a rate of 2.5lt/m²

Saturate FLASH HARRY FLASH PATCHES S.B.P. patches with FLASH HARRY LIQUID PLASTIC over all roof bolts

Apply 2 coats FLASH HARRY FROGSKIN waterproofing roof paint at a rate of 10m²/lt per coat



Specification:

1. FLASH HARRY RUST STOP

Option 1

FLASH HARRY LIQUID PLASTIC with 100mm S.B.P. membrane

Option 2

FLASH HARRY DRIP STOP with 75mm S.B.P. membrane

3. Finishes:

Option 1

LIQUID PLASTIC or FROGSKIN ROOF PAINT

Option 2


FLASH HARRY ALUCOAT SILVER

Check and secure all roof bolts and replace if and when necessary

Wire brush all rust and any flaking paint

High pressure wash removing all sand, dust and debris insuring a clean surface

Drill and secure side laps with heavy duty rivets where loose

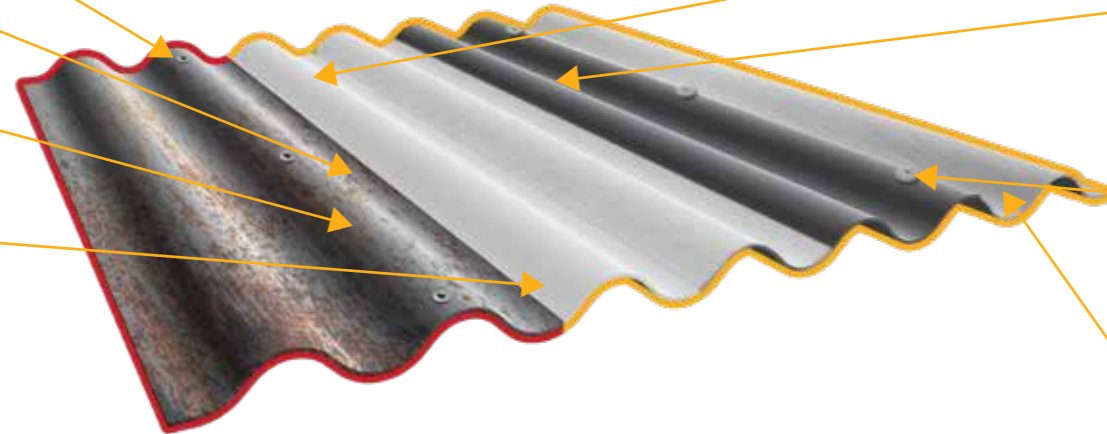

Apply one coat of FLASH HARRY RUST STOP over all rusted areas

Apply 3 coats FLASH HARRY LIQUID PLASTIC reinforced with 75mm S.B.P. membrane to all side and end laps at a rate of 2.5lt/m²

Saturate FLASH HARRY FLASH PATCHES S.B.P. patches with FLASH HARRY LIQUID PLASTIC over all roof bolts

Apply 2 coats FLASH HARRY ALUCOAT SILVER bituminous aluminium protective coating at a rate of t at a rate of 10m²/lt per coat

RUST STOP	LIQUID PLASTIC	WATERPROOFING MEMBRANE	FIBRE FLEX	FLASH PATCH	ALU-COAT SILVER	FROG SKIN ROOF PAINT
Rust preventing acrylic primer	A pure acrylic waterproofing polymer.	S.B.P waterproofing membrane	Premium quality fibre-reinforced acrylic.	Membrane roof screw patches	Bituminous Aluminium paint	A terpolymer roof paint for use on metal & tiled roofs